



the future is safer with altro

altro

Altro Wood Smooth™

Smooth flooring / Pavimento ligero / Glattbelag

Altro Wood Smooth Acoustic™

Smooth acoustic flooring / Pavimento ligero acústico / Akustik-glattbelag

Altro Wood Smooth part numbers shown in grey, Altro Wood Smooth Acoustic shown in blue.

Altro Wood Ligerio números de pieza se muestran en gris, Pavimento Ligerio Acústico se muestra en azul.

Artikelnummern für Altro Wood Smooth sind in grau, für Altro Wood Smooth Acoustic in blau dargestellt.




White Oak WSM2051
WR335 / A1M335 / LRV 52




Light Maple WSM2055
WR339 / A1M339 / LRV 24



Pale Cherry WSM2052
WR336 / A1M239 / LRV 22



Classic Cherry WSM2053
WR337 / A1M337 / LRV 17



Mellow Oak WSM2056
WR340 / A1M340 / LRV 37



Mature Walnut WSM2061
WR345 / A1M62 / LRV 6



Mature Oak WSM2062
WR346 / A1M62 / LRV 8



Red Maple WSM2060
WR344 / A1M41 / LRV 10



Forest Oak WSM2069
WR353 / A1M225 / LRV 25



Victorian Oak WSM2070
WR227 / A1M227 / LRV 10



Greyed Oak WSM2063
WR347 / A1M200 / LRV 38



Black Oak WSM2064
WR348 / A1M200 / LRV 7




Mid Walnut WSM2057
WR341 / A1M160 / LRV 15
Acoustic Option
Lull WSMA3782



Warm Beech WSM2058
WR342 / A1M224 / LRV 36
Acoustic Option
Haven WSMA3783



Flaxen Oak WSM2054
WR338 / A1M27 / LRV 38
Acoustic Option
Hush WSMA3781



Rich Cherry WSM2059
WR343 / A1M246 / LRV 15
Acoustic Option
Karma WSMA3784

Light Reflectance Values measured in accordance with BS8493:2008. Exact material match with samples cannot be guaranteed.

No podemos garantizar que el tono del suelo de seguridad coincida exactamente con el de las muestras.

Eine exakte Übereinstimmung des materials mit mustern kann nicht garantiert werden.

Codes: **WR** = weld rod, **A1M** = mastic, **LRV** = light reflectance value.

Códigos: **WR** = Cordón de soldadura, **A1M** = Mástique, **LRV** = Valor de reflectancia de la luz.

Abkürzungen: **WR** = Schweißschnüre, **A1M** = Altro mastic dichtmasse, **LRV** = Lichtreflexionswert




















www.altro.com

Beech
Walnut, Maple & Cherry
Oak

plank lengths 600mm and 400mm, width 83.3mm
plank lengths 550mm and 450mm, width 100mm
plank length 500mm, width 100mm

A+ BRE generic green guide
rating for smooth flooring,
full details available at
www.thegreenguide.org.uk



Flooring type Tipo de pavimento Belagsart			Smooth flooring EN ISO 10582 Pavimento ligero Glattbelag	Smooth acoustic flooring EN 651 Pavimento ligero acústico Akustik-glattbelag
Classification for use Areas de uso Einsatzbereiche		EN ISO 10874		
Slip resistance Resistencia al deslizamiento Rutschsicherheit*		EN 13893 DIN 51130	DS R10 - For lifetime sustainable wet slip resistance please refer to Altro safety flooring	DS R10 - For lifetime sustainable wet slip resistance please refer to Altro safety flooring
Thickness Espesor total Gesamtdicke		EN ISO 24346	2 mm	3.7 mm
Wear layer Capa de uso Nutzschicht		EN ISO 24340	0.7 mm	0.65 mm
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme bestanden	Pass Conforme bestanden
Weight Peso Flächengewicht		EN ISO 23977	2.66 kg/m ²	2.75 kg/m ²
Roll dimensions Dimensiones del rollo Rollenabmessungen		EB ISO 24341	2 m x 20 m = 40 m ²	2 m x 20 m = 40 m ²
Light fastness Resistencia a la luz Lichtechtheit		EN ISO 105-B02	≥6	≥6
Sound insulation Aislamiento acústico Trittschall		ISO 140-8	ca. 4dB	ca. 18dB
Wear resistance Abrasión Verschleißverhalten		EN 660-2	Group T	Group T
Indentation Punzonamiento Resteindruck		EN ISO 24343-1	≤ 0.10mm	≤ 0.20mm
Fire performance Reacción al fuego Brandverhalten		EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl s1 ≥8kW/m ² pass Clase Bfl s1 ≥8kW/m ² conforme Klasse Bfl-s1≥8kW/m ² , bestanden	Class Cfl s1 ≥4.5kW/m ² pass Clase Cfl s1 ≥4.5kW/m ² conforme Klasse Cfl s1≥4.5kW/m ² bestanden
Chemical resistance Resistencia a los productos químicos Chemikalieneinwirkung**		EN 423	Good Buena beständig	Good Buena beständig
Castor chair abrasion Huellas de ruedas de sillas Stuhlrollenbeanspruchung		EN 425	Pass Conforme geeignet	Pass Conforme geeignet
Under floor heating Calefacción por el suelo Fußbodenheizung		EN 12667	Suitable Apto geeignet	Suitable Apto geeignet
Electrical behaviours Características eléctricas Elektrisches Verhalten		EN 1815	≤ 2kV Antistatic ≤ 2kV Antiestáticas ≤ 2kV antistatisch	≤ 2kV Antistatic ≤ 2kV Antiestáticas ≤ 2kV antistatisch
VOC emissions Emisiones de VOC VOC emissionen		AgBB/DiBt	Approved Aprobado zugelassen	Approved Aprobado zugelassen


All Altro construction vinyl flooring contains bio-plasticiser and is phthalate-free.

* We recommend the use of Altro Aquarius™ for combined shoe and barefoot use in wet and dry areas such as hospital bathrooms and Altro Marine™ 20 / T20 for barefoot use in shower cubicles. Always check local regulations.

** Caution ketone / aromatic solvents. Please contact Altro for further technical advice regarding staining and chemical resistance. Certain chemicals may cause staining of vinyl. Traffic stain can be caused by oil residue, certain cleaning agents, asphalt and anti-oxidants in some types of rubber.

Installation and Maintenance

All installations in accordance with Altro smooth flooring instructions and local codes of practice. Please refer to Altro cleaning card for maintenance information. Failure to install and maintain Altro flooring in accordance with installation instructions can affect its performance. Floors should be protected from other trades and thoroughly cleaned before handover. All information is correct at the time of print and is subject to change without prior notice. Visit us at www.altro.com for more information and updates.

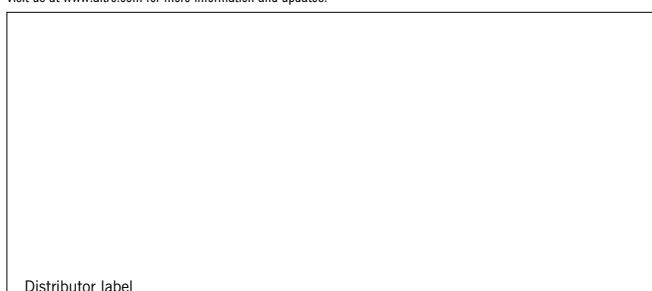

For further technical information please visit www.altro.com / www.asf.com.au
Si desea obtener más información técnica, visite www.altroscandess.com
Weitere technische Informationen finden Sie auf unserer Website www.altro.de



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.



+44 1462 707700
+34 91 649 5230
+49 40 514949 0
+45 36 78 90 33
+46 40 31 22 00
+61 3 9764 5566

Altro Ltd. Works Road
Letchworth Garden City
SG6 1NW, United Kingdom

EN ISO 10582 / EN651